

OASIS®

DEHUMIDIFIERS

For convenience, long life, dependable performance.

Features and Specifications	D75	D125	D165
Capacity in Liters*	7.5	12.5	16.5
Adjustable, Automatic Humidistat	Yes	Yes	Yes
Automatic Signal Light	Yes	Yes	Yes
Automatic Overflow Protection	Yes	Yes	Yes
9.5 Liter Moisture Container	Yes	Yes	Yes
Threaded Hose Connection	Yes	Yes	Yes
Automatic Hot Gas Defrost System	Yes	Yes	Yes
Greystone Vinyl	Yes	Yes	Yes
4 Swivel Casters (2 with locks)	Yes	Yes	Yes
Air Filter	Yes	Yes	Yes
Carry Handles	Yes	Yes	Yes
Compressor	1/5HP	1/4HP	1/3HP
R134a Refrigerant (CFC-Free)	Yes	Yes	Yes
Full Load Amps	2.1	2.8	3.6
Watts	275	370	485
Net Weight-Kilograms	20.2	22.7	23.5
Air Flow-Cubic Meters per Hour	425	425	510
Outside Dimensions w/Casters	38 cm wide	60.5 cm high	36.2 cm deep

*Water-removal capacities in liters per 24 hours.

Automatic hot gas defrost system:


All models are fitted with a sensor that initiates a programmed defrost cycle. The defrost system includes an electronic timer and a hot gas valve to insure that the coils are quickly defrosted.

These dehumidifiers are designed for maximum performance under a wide range of temperature and humidity conditions. From 6° C to 40° C and within relative humidity extremes from 50% RH and above.


Limited Warranty: One-year parts from purchase date, with an additional four years on any part of the sealed refrigeration system. Complete warranty, including exceptions, enclosed with each dehumidifier. Sample copy available upon request.

How Moisture is Removed from Air:

Fan draws room air through back of OASIS dehumidifier and over cold coil. As warm, humid air passes over coil, moisture condenses, drops into drip tray, and is funneled into 9.5 liter container. (Or container may be removed, hose attached to drip tray, and moisture channeled to floor drain.) Dried air then passes over hot condenser coils of refrigeration system, through front grille, and back into room at about its original temperature.

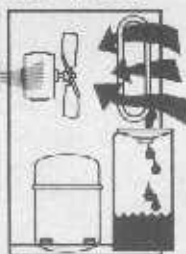


Convenient Handles and Attractive, Durable Greystone Cabinet.

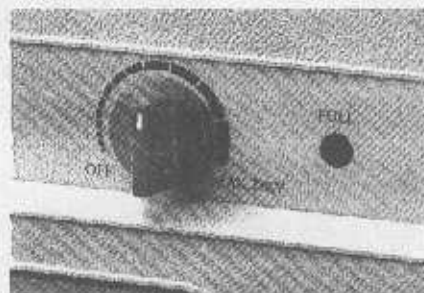

Automatic Humidistat Control allows the unit to adjust to different moisture conditions. The unit also has "off" and "continuous run" features.



Four Swivel Casters - two w/locks allows unit to be moved easily.

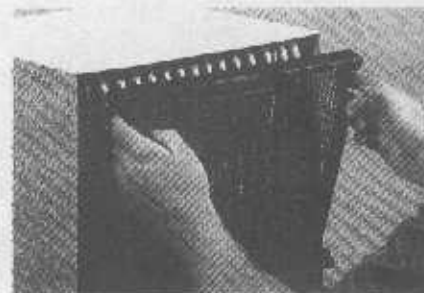

Air Filter - protects refrigeration system from dust and dirt and helps maintain performance.

MODEL SELECTOR GUIDE

Values in table indicate dehumidification required in liters per 24 hours, based on the area of space to be dehumidified and the conditions that would exist in that space when a dehumidifier is not in use.

Dehumidification variables also include such other factors as climate, laundry equipment, number of family members, number of doors and windows, and degree and intensity of area activity.

AREA CUBIC METERS	115	225	340	450
CONDITION WITHOUT DEHUMIDIFICATION (During warm and humid outdoor conditions)				
Moderately damp-space feels damp and has musty odor only in humid weather.	4.7	6.6	8.5	10.3
Very damp-space always feels damp and has musty odor. Damp spots show on walls or floor.	5.6	8.0	10.3	12.7
Wet-space feels and smells wet. Walls or floor sweat, or seepage is present.	6.6	9.4	12.2	15.0
Extremely wet-laundry drying, wet floor, high load conditions.	7.5	10.8	14.1	16.5


OASIS® is a registered trademark of EDCO® Manufacturing Company

Specifications Subject To Change Without Notification

OASIS® 
 Bunree Industrial Estate
 Ballina Co. Mayo Ireland
 Phone: 353-96-71222
 Fax: 353-96-71433

OASIS[®]

DEHUMIDIFIERS

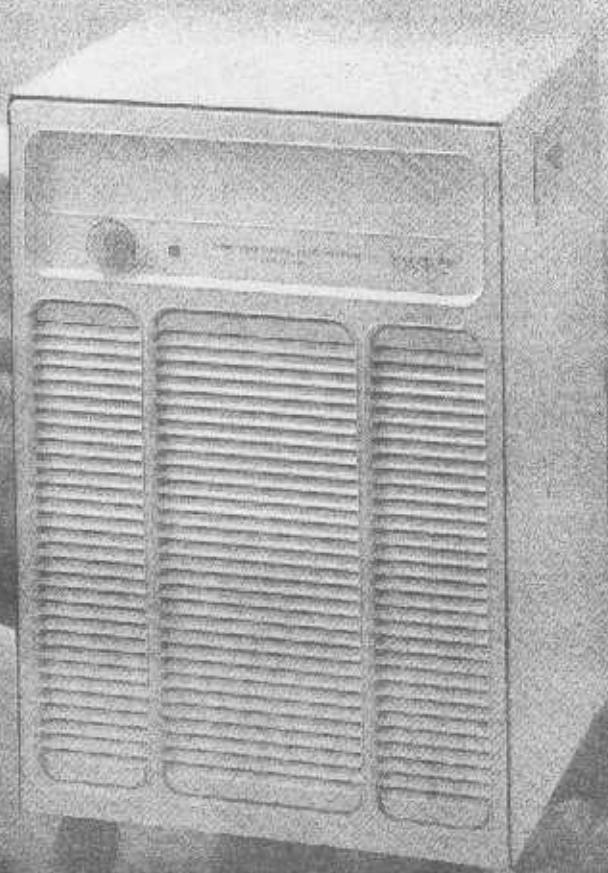

These stylish, automatic frost-free dehumidifiers protect your home against moisture and dampness. OASIS[®] products use environmentally friendly, non-CFC recyclable refrigerants. They are safer for people and safer for our planet.